


Gasket sheet AF-200 G typ 227

Application:

Sheet of high operating parameters, for the manufacture of which a special combination of mineral fibres and graphite has been used. The sheet is characterized by high flexibility

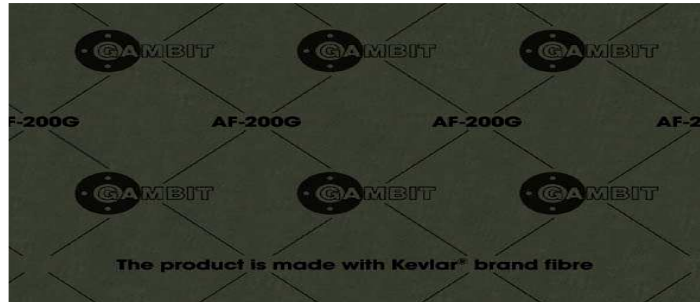

TECHNICAL PARAMETERS:

Standards satisfied and approvals	
Classification per DIN 28091-2	FA-AM1-O
Basis	aramid fibres, mineral fibres, NBR, caoutchouc, natural graphite
Density	1,9
Maximal operating conditions:	
Peak temperature	380°C
Continous temperature	320°C
Continous temperature in steam	250°C
Pressure -	8 MPa