


Gasket sheet AF-400 TYPE 245

Application:

Sheet of high parameters, made of high quality raw materials. It is characterized by a high reliability and a broad spectrum of applications. It has been approved for use in sub-inspection connections and natural gas transfer systems.

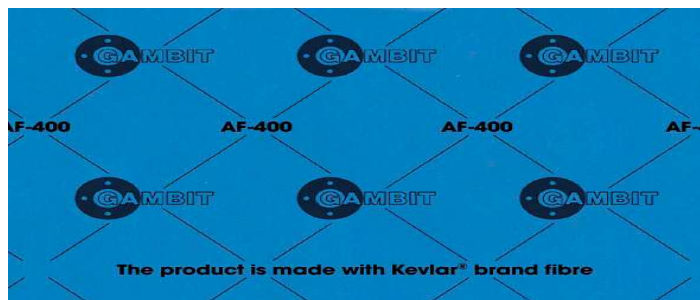

TECHNICAL PARAMETERS:

Standards satisfied and approvals	DuPont Specification G-81 UDT
Classification per DIN 28091-2	FA-AM1-O
Basis	aramid fibres, mineral fibres, NBR
Density	2,0
Maximal operating conditions: Peak temperature	400 ⁰ C
Continous temperature	350 ⁰ C
Continous temperature in steam Pressure	260 ⁰ C 12 MPa
Factors per ASME CODE	"y" - 1,0 "m" - 2,4
Factors per DT-UC-90/WO-0/19: S_m dla: 1mm, 2mm, 3mm S_r dla: 1mm, 2mm, 3mm b dla: 20, 200, 300 °C	40Mpa 21Mpa 12Mpa 6,4p _o 5p _o 4,1p _o 1,1 1,8 3,0